



Geoscanners AB®

## MID FREQUENCY ANTENNAS COMPARISON IN GAIASPECTRUM® STANDARD

This is a short survey of two commercially available antennas, the HBD-350 manufactured by Radarteam Sweden AB Boden, Sweden, and the RAMAC-500MHz manufactured by MALÅ GeoScience AB Malå, Sweden. We got access to data collected with both antennas in approximately similar conditions and with the radar systems they were designed to work with. Both data sets were not altered in any way and can be considered both to be what is called "raw data".

### MANUFACTURER'S DATASHEETS

First of all we decided to get some data about these devices, to get an idea of what to expect from the data sets. Our search for technical info was restricted solely to the respective websites of the antenna manufacturers.

This is a summary of what we could find:

Parameter	HBD-350	RAMAC-500 MHz
Manufacturer	Radarteam Sweden AB	MALÅ GeoScience AB
Web site	<a href="http://www.radarteam.se">www.radarteam.se</a>	<a href="http://www.malags.se">www.malags.se</a>
Available datasheet	YES	NO
Dimensions (LxWxH)	740x405x225 (mm)	0.5X0.33x0.16 (meters)
Weight	6 kg	5 kg
Type of antenna	Hemispherical butterfly dipole	Not Available
Center Frequency (-10dB BW)	334 MHz	We assumed 500 MHz
Bandwidth (-10dB BW)	80.8%	Not Available
Shielding	Top shielded	Shielded

**Table 1 Brief datasheet of the devices**

From table 1 it is clear that both antennas are close in size and weight, the center frequency of the RAMAC-500 MHz is around 40% higher but that is not a big problem due to the very broad bandwidths of ground penetrating antennas. The fact

that the HBD-350 is only top shielded most probably has some effect in the amount of signal to noise ratio. The data sets for the RAMAC-500 MHz were taken in a sandy area in Massachusetts, USA and the data sets for the HBD-350 were taken in a sandy location in northern Sweden. With all this, it was time to put GaiaSpectrum® to work.

## **SETTING UP THE WORK**

The first thing to do was to import into GaiaSpectrum® the largest data set collected with the RAMAC-500 MHz. We set up a uniform window function because we didn't want the smoothing functions to interfere with the results. Different manufacturers have different ways of setting up the beginning of the collection of the scan, resulting in a different position of the smoothing window with respect to the transmitted pulse.

Another thing to take into consideration is the fact that files collected with the RAMAC systems do not have necessarily a power of two amounts of samples per trace. Our data set was collected with that in mind and we got it to be a power of two. Usually when working with only one device that's not needed because GaiaSpectrum® offers the possibility of importing a file with a non power of two number of samples per trace. The adjustment is then done by truncation or padding with zeroes. Anyway, we wanted to be as fair as possible and therefore collected the data in both cases with the same amount of samples per trace.

When the file was already imported, we selected peak-hold mode in order to get as much data as possible in one screen. We selected to show the level as dBc to ease the interpretation of the resulting spectrum. And finally set the program to run.

The final result was stored as a reference file, and since we were going to analyze the HBD-350 right after, we set the spectrum in reference number one. This is simply done by calling the reference setup and pressing the set button.

We closed the RAMAC-500 MHz antenna file and loaded the file collected with the HBD-350. Everything was done in the same way to get as accurate results as possible.

## **ANALYZING THE DATA**

With the final spectrum for the HBD-350 loaded in the spectrum data view, we loaded the result for the RAMAC-500 MHz that was previously saved as reference number one. In such a way both results were loaded simultaneously in the spectrum data view and it was possible to make some measurements.

We didn't take advantage of the markers function because in GaiaSpectrum® standard that function is only available for the active file not for the reference ones. The idea was to make the measurements as close as possible and using the markers for one file and not for the other would have defeated the purpose.

With the aid of the cross hair line and the upper side readings we could establish all the data necessary to find out elemental parameters of each antenna. In table 2 the results are shown.

Parameter	HBD-350	RAMAC-500 MHz
-10 dB Lower Limit	187 MHz	189 MHz
-10 dB Upper Limit	477 MHz	429 MHz
-10 dB Band	290 MHz	240 MHz
-10 dB Center Frequency	332 MHz	309 MHz
-10 dB Bandwidth	87.3 %	77.6 %
Noise Floor (Average)	-25 dB	-32 dB
Bandwidth datasheet info to measurement error	-7.5%	N/A
Center Frequency datasheet info to measurement error	- 0.1 %	-38.2 % (No datasheet available, only by the 500 MHz in the device name)

**Table 2 Obtained results**

## CONCLUSIONS

As we could see both devices are very similar in parameters with a few differences. First, the datasheets that Radarteam Sweden AB web site offered turned out to be reliable and accurate. Since there was no datasheets for the RAMAC-500 MHz antenna one can only guess by the name of the device. Which in principle, might be wrong since 500 MHz can be just a generic name not explicitly related to the center frequency of the antenna.

At the end the center frequencies of both devices were practically in the same spot considering the broad bandwidths of the devices. The HBD-350 antenna has a better bandwidth but as expected it a bit more of noise floor.

Another thing to note about this measurement is that the HBD-350 antenna has not only a broader bandwidth but, as it can be seen in figure two it also has a much more flatter top. That is, the frequency components in the available bandwidth have much closer magnitudes to one another than in the case of a sharper terminated spectrum.

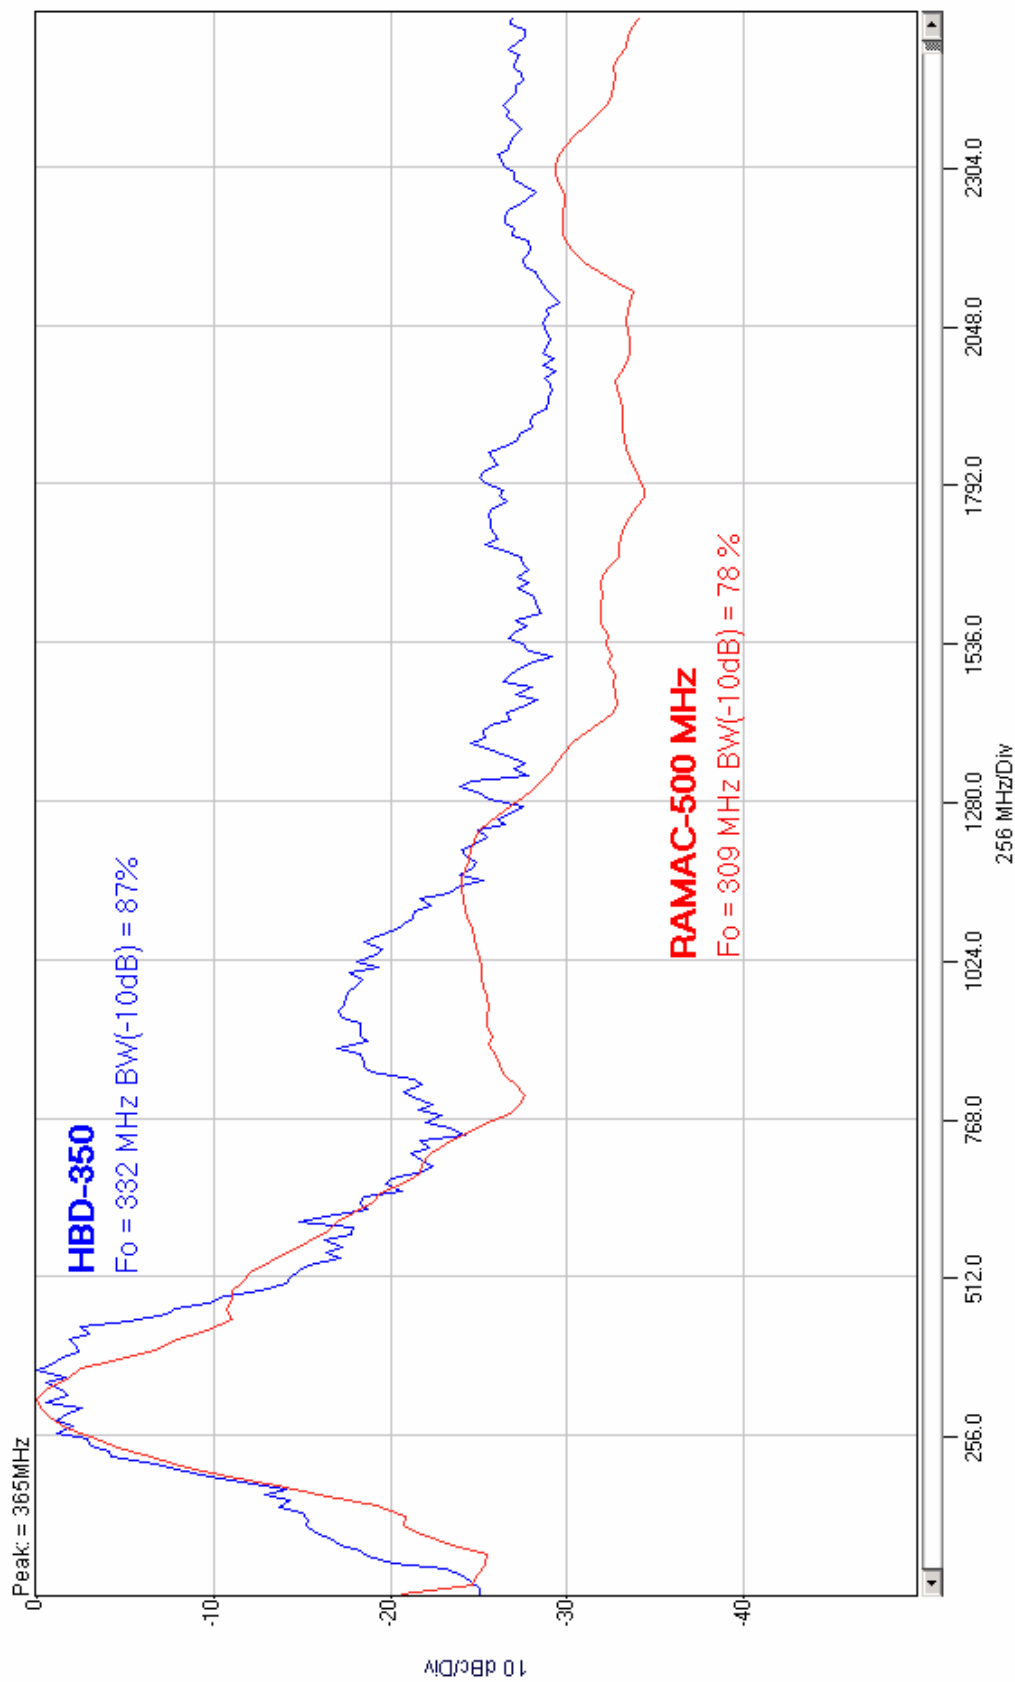


Figure 2 Spectrum data view saved file

## **TERMS OF USE:**

Geoscanners AB has made all reasonable efforts to ensure that all information provided through this document is accurate at the time of inclusion; however, there may be inadvertent and occasional errors for which Geoscanners AB apologizes.

Geoscanners AB accepts no liability for any inaccuracies or omissions in this document and any decisions based on information contained in this document are the sole responsibility of the reader. Geoscanners AB accepts no liability for any direct, special, indirect, or consequential damages, or any other damages of whatsoever kind, resulting from whatever cause through the use of any information obtained either directly or indirectly from this document.

This document may not be copied, reproduced, re-published, downloaded, posted, broadcast or transmitted in any way except for your own personal use. Any other use requires the prior written permission of Geoscanners AB. You agree not to adapt, alter or create a derivative work from any of the material contained in this document or use it for any other purpose other than for your personal use. You agree to use this document only for lawful purposes, and in a manner which does not infringe the rights of, or restrict or inhibit the use and enjoyment of this document by any third party.

This document and the information, names, images, pictures, logos and icons regarding or relating to Geoscanners AB, its products and services (or to third party products and services), is provided "AS IS" and on an "IS AVAILABLE" basis without any representation or endorsement made and without warranty of any kind whether express or implied, including but not limited to the implied warranties of satisfactory quality, fitness for a particular purpose, non-infringement, compatibility, security and accuracy.

In no event will Geoscanners AB be liable for any damages including, without limitation, indirect or consequential damages, or any damages whatsoever arising from use or loss of use, data, or profits, whether in action of contract, negligence or other tortious action, arising out of or in connection with the use of this document. Geoscanners AB does not warrant that the functions contained in the material contained in this document will be uninterrupted or error free, that defects will be corrected. The names, images and logos identifying Geoscanners AB and their products and services are proprietary marks of Geoscanners AB. Nothing contained herein shall be construed as conferring by implication or otherwise any license or right under any trade mark or patent of Geoscanners AB, or any other third party.

If there is any conflict between these Terms and Conditions and rules and/or specific terms of use appearing in this document relating to specific material then the latter shall prevail. If any of these Terms and Conditions should be determined to be illegal, invalid or otherwise unenforceable by reason of the laws of any state or country in which these Terms and Conditions are intended to be effective, then to the extent and within the jurisdiction which that Term or Condition is illegal, invalid or unenforceable, it shall be severed and deleted from this clause and the remaining terms and conditions shall survive, remain in full force and effect and continue to be binding and enforceable.

These Terms and Conditions shall be governed by and construed in accordance with the laws of Sweden. Disputes arising here from shall be exclusively subject to the jurisdiction of the courts of Sweden.

If these Terms and Conditions are not accepted in full, the use of this document must be terminated immediately.